

FLASHRIGHT® Insert Panel Replacement Instructions


- 1) Place the Insert Panel removal key (or any key) in one of the bottom slots and pry open.

Note: Use the same movement as opening a can of paint.

DO NOT USE A SCREW DRIVER



Panel will pop out and down.

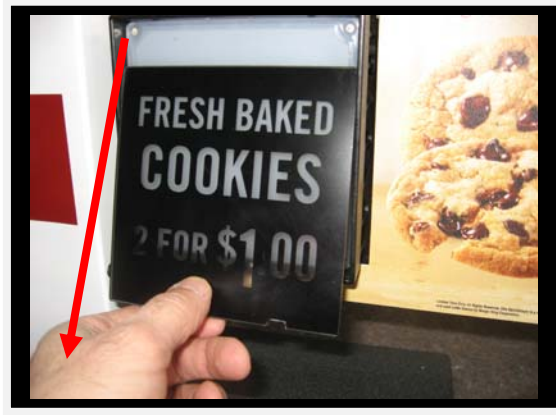

- 2) Take the new Panel and slide it up behind the bumps on the top and "snap" the bottom in place.

Make sure it is behind the 2 bumps on the top.



Make sure it is behind the bottom 2 bumps and is "snapped" in place.



FlashRightDisplays.com
Tel. 678-455-9121

← Flip the page over for Surround Panel Instructions →