


Optional Side Mounting
Gray - White or Metal Speaker Post



- Set up the FlashRight display as shown on the next page and in the support video on the website; www.FlashRightDisplay.com/installationsupport

Set up the Display the same as you would do for the Flush Mount Kit but use the Offset Bracket.

- Ring Bracket should have tabs on the Top, Left, Right
- Add the Offset Bracket to the Left Side, behind the Left Tab (Looking at the front of the display)
- Secure with all (6) Screws

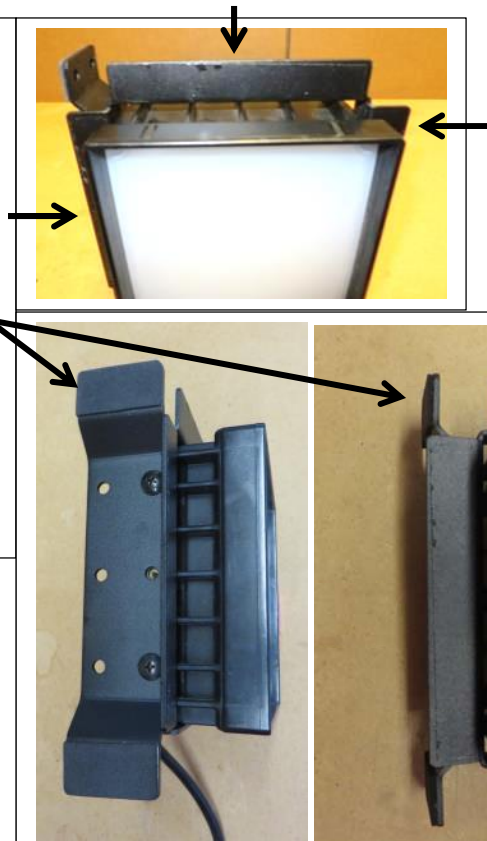

- Align the Ring Bracket of the Display to the front of the Gray, White or Metal Speaker Post
 - Make sure the POP Panel will fit on to the front of the ring without any interference of the Metal Speaker Post
 - You might need to provide spacers and longer screws on the EverBrite Metal Post due to the curve of the outside
 - The Wire Pads (supplied in kit) could be used as spacers
- Secure the display to the Right side of the Speaker Post using the Self-Tap or #10 screws (If the Self-Tap screws strips out use the larger #10 screws)
- Run the wire into the Metal case and use the Weather Connector (supplied)
 - There is a full video & additional installation information online “Side Mount Speaker Post” at www.FlashRightDisplays.com/InstallationSupport

